



Military Grade 20' x 8'6" Refrigerated ISO Container

STANDARD FEATURES

- Stainless steel interior wall lining
- Double swing doors on one end
- Aluminum T-Grade floors
- (2) Fork lift pockets
- Carrier Refrigeration Unit (Model #69NT-40)
- Temperature range from -20°F to 70°F
- 380/460 Volts AC, 3 phase, 50 or 60 cycle
- Zero-ODP HFC-134a
- 30ft power cables provided
- Main power circuit breaker
- ABS Certification
- Microlink III (ML3) microprocessor controller with power up and integral DataCORDER (365 days) for state of the art temperature control
- Industry-leading low air leakage:
- less than 0.14 CMH (5 CFH) at 50.8 mm (2 in.) W.g.
- Removable front service panels
- Forklift pockets to easily replace machines
- Document holder with waterproof door




OPTIONAL FEATURES

- Quick-Connect dual voltage transformer 208/230 Volts AC, 3 phase, 50 or 60 cycle
- Interior light with switch

Discount for purchases above 15
Cost does not include shipping
Manufactured in the USA

Cost per unit: \$61,850.00 USD

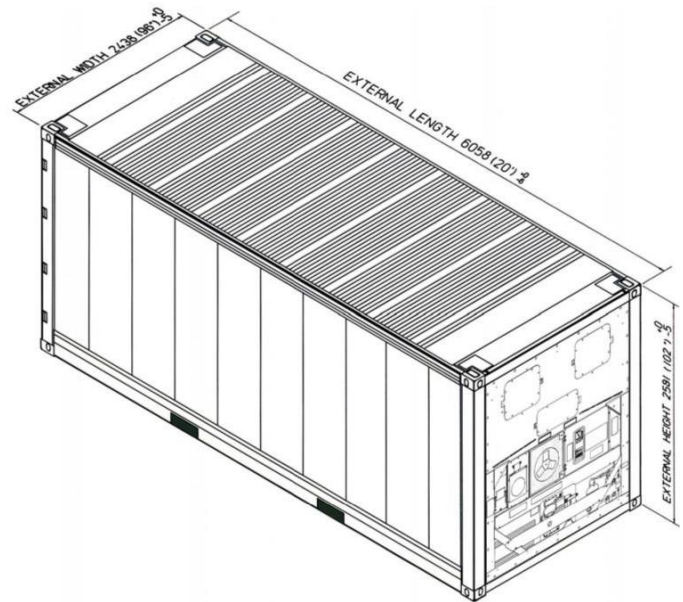

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARDS

	LENGTH		HEIGHT		WIDTH		DOOR OPENING		
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width	
Ft in	19' 10 1/2"	18' 37/64"	8' 6"	7' 5 31/64"	8' 0"	7' 6 5/16"	7' 5 9/64"	7' 6 5/32"	
Metric	6,058	5,501	2,591	2,273	2,438	2,294	2,264	2,290	
		TARE WEIGHT		PAYLOAD		GROSS WEIGHT		CUBIC CAPACITY	
Lbs	6,370		60,830		67,200		1,018 Cu.Ft.		
Kgs	2,890		27,590		30,480		28.7 Cu.M.		

ISO 9001



CERTIFIED QUALITY
MANAGEMENT SYSTEM
 CONTRACT # GS-02F-0024P

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS