



Military Grade Double Doors Both Ends Standard 20' x 8' 6" Dry Freight ISO Cargo Container

STANDARD FEATURES

- Corrugated steel sides, roof + swing doors on both ends
- (2) way laden forklift pockets
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs per 44 square inches
- Wall tie down steel lashing rings, 6,000 lbs. cap. each (24 total)
- Door corner post tie downs, (20) total = restraint system, shoring slot will support 2" x 6" lumber
- Floor recessed tie downs (10 total)
- Vents, (2) each
- Military Standard 595B 33446 STANDARD TAN exterior paint




OPTIONAL FEATURES

- Manifest box (2) each
- 2nd set unladen forklift pockets

Discount for purchases above 15
Cost does not include shipping
Manufactured in the USA

Cost per unit: \$30,420.00 USD

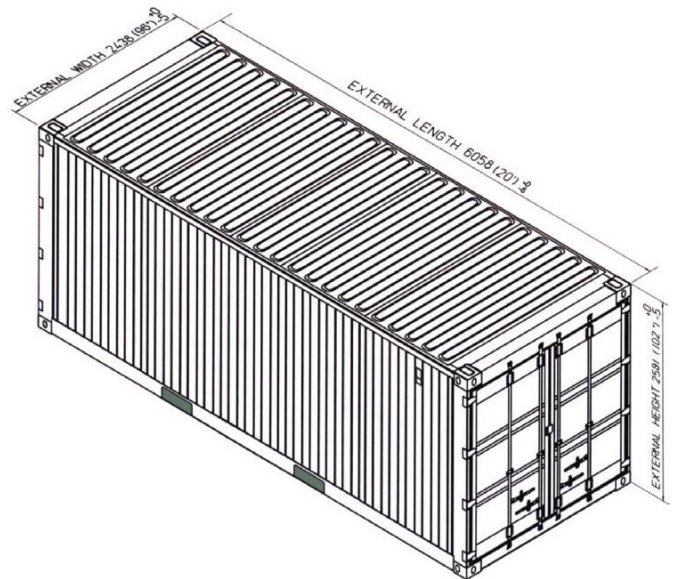

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

| SB862.6 | LENGTH (+0/-6) | | HEIGHT (+0/-5) | | WIDTH (+0/-5) | | DOOR OPENING (+0/-5) | |
|----------------|----------------|-------------|----------------|------------|---------------|-------------|----------------------|-----------|
| | Exterior | Interior | Exterior | Interior | Exterior | Interior | Height | Width |
| Ft. in. | 19' 10 1/2" | 19' 2 5/64" | 8' 6" | 7' 10 3/8" | 8' 0" | 7' 8 19/32" | 7' 6 1/32" | 7' 8 1/8" |
| Metric | 6,058 | 5,844 | 2,591 | 2,397 | 2,438 | 2,352 | 2,287 | 2,340 |
| | TARE WEIGHT | | PAYLOAD | | GROSS WEIGHT | | CUBIC CAPACITY | |
| Lbs. | 5,020 | | 62,180 | | 67,200 | | 1,163 Cu. Ft. | |
| Kgs. | 2,277 | | 28,203 | | 30,480 | | 32.94 Cu. M. | |

ISO 9001



**CERTIFIED QUALITY
MANAGEMENT SYSTEM**

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS